


fan kit 0240, 12V / 24V DC

for oil/air blast coolers TT 06, TT 07

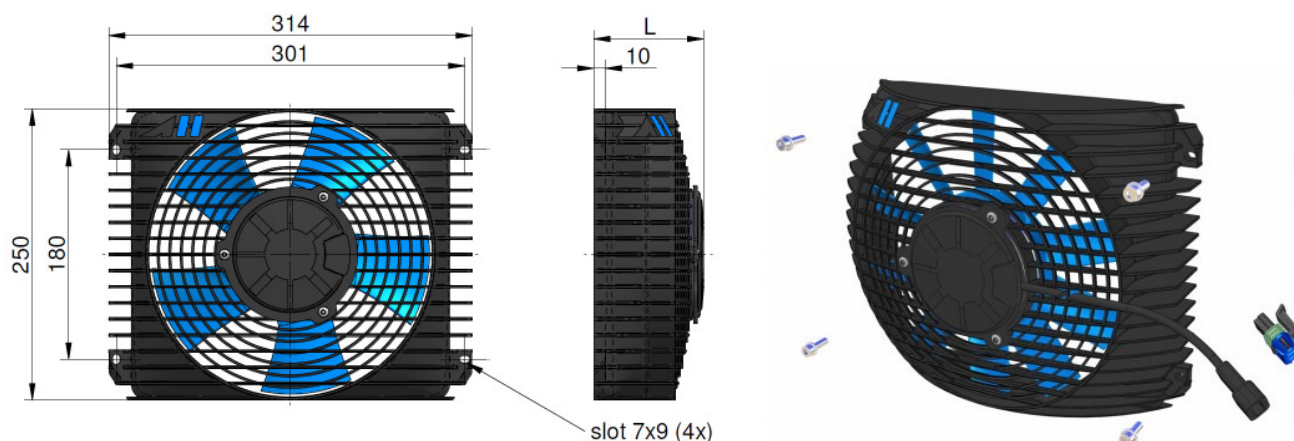


Technical Data ^{*)}

order number	description	current ^{*)}	motor power	protection level	L	weight
		[A]	[kW]		[mm]	[kg]
ILLELE0240A1	fan kit 0240, TT 06, 12V	7,4	0,096	IP 68	93	1,53
ILLELE0240A2	fan kit 0240, TT 06, 24V	3,7	0,096	IP 68	93	1,53
ILLELE0240A3	fan kit 0240, TT 07, 12V	10,4	0,135	IP 68	93	2,03
ILLELE0240A4	fan kit 0240, TT 07, 24V	5,2	0,135	IP 68	93	2,03
ILLELE0240O5	fan kit 0240, TT 07 HP, 12V	16,2	0,211	IP 68	110	2,50
ILLELE0240O6	fan kit 0240, TT 07 HP, 24V	8,1	0,211	IP 68	110	2,50

^{*)} given data are running currents, for start up 3x higher current has to be calculated!

Performance Data

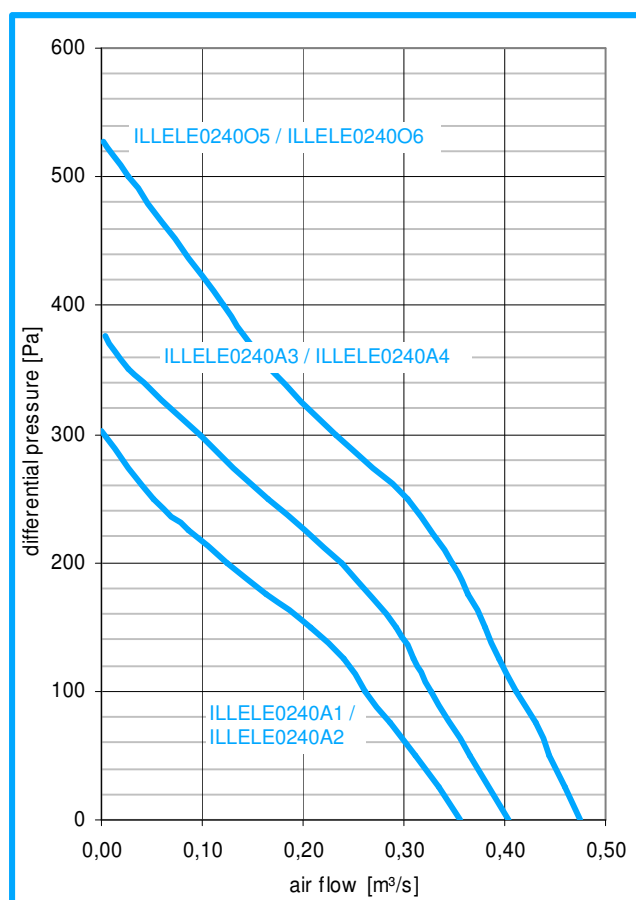

ambient conditions

ambient temperature range -20°C to +80°C

storage temperature range -40°C to +120°C

Important: Assure sufficient air circulation!

supply

12V DC $\pm$ 10% 24V DC $\pm$ 10%

maximum allowed ripple 1%

Check for right polarity! Inverse polarity may damage the fan!

recommended fuse (slow acting)

ILLELE0240A1 10 A

ILLELE0240A2 5 A

ILLELE0240A3 15 A

ILLELE0240A4 7,5 A

ILLELE0240O5 20 A

ILLELE0240O6 10 A

housing

material polyamide

accessories

temperature control ILLZTC12K, ILLZTC24K

content of fan kit

1x fan unit, 4x screws, 4x washer, 1x counter connector

^{*)} all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.